




## Castor primair LED driver/controller 150W 24v DC

### Specifications:

Voltage:	DC24V
Max load current:	6.25A
Working temperature:	-20° - 50°
Control:	Triac/ELV
Output:	150 watt
LxWxH:	196x75x40mm
Model number:	39631

### Function

The Castor LED driver/controller is a single channel 24VDC, constant voltage, primair dimmable controller. It supports both leading edge (Triac) and trailing edge (ELV). This controller is able for current-controlled sources and has a maximum output of 150 watt. The Castor LED controller has a high efficiency up to 89%, an output short circuit protection, over power protection and over temperature protection

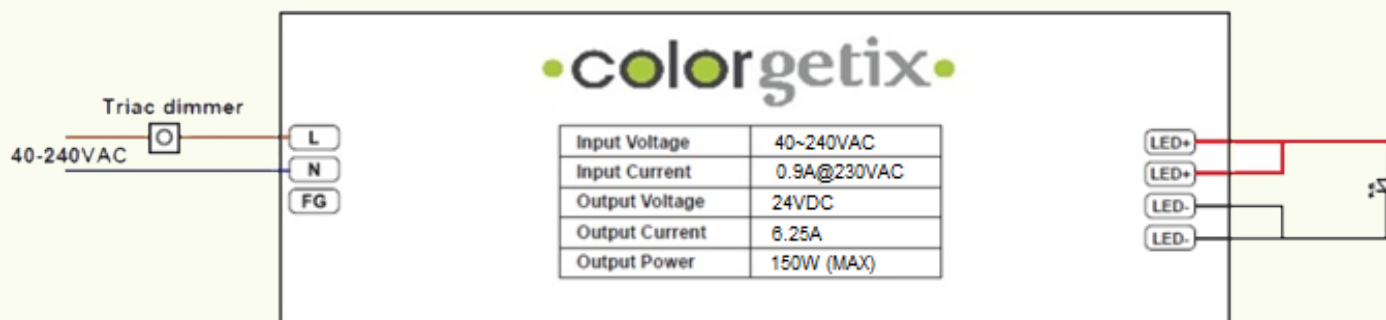

### Safety Information

1. This product is non-waterproof, please avoid the sun and rain. Put it in a waterproof box if install outdoor.
2. The condition of radiation will affect the working life of the controller, please install the product in a good radiation condition.
3. Please check the output voltage of the LED power supply. The input voltage of this controller should be followed.
4. Ensure all wire connections are correct before connecting power, which is to avoid LEDS to be burnt because of wrong connection.
5. Please contact your supplier if you have any questions.
6. This product is 1 year free warranty. In this period we guarantee replacement or repairing with no charge, but exclude the artificial situation of damage.